

521,396  
Roc'd PCT/PTO 14 JAN 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



10/521396



(43) International Publication Date  
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number  
WO 2004/008706 A2

(51) International Patent Classification<sup>7</sup>: H04L 27/26

Str. 30, 15232 Frankfurt/Oder (DE). GRASS, Eckhard [DE/DE]; Nickelwalder Strasse 2, 12589 Berlin (DE).

(21) International Application Number:

PCT/EP2003/007750

(74) Agent: EISENFÜHR, SPEISER & PARTNER; Anna-Louisa-Karsch-Str. 2, 10178 Berlin (DE).

(22) International Filing Date: 16 July 2003 (16.07.2003)

(81) Designated States (national): JP, US.

(25) Filing Language: English

(84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(26) Publication Language: English

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations JP, European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR)

(30) Priority Data:  
02090257.3 16 July 2002 (16.07.2002) EP


Published:

— without international search report and to be republished upon receipt of that report

(71) Applicant (for all designated States except US): IHP GMBH-INNOVATIONS FOR HIGH PERFORMANCE MICROELECTRONICS / INSTITUT FÜR INNOVATIVE MIKROELEKTRONIK [DE/DE]; Im Technologiepark 25, 15236 Frankfurt (DE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND DEVICE FOR FRAME DETECTION AND SYNCHRONIZER

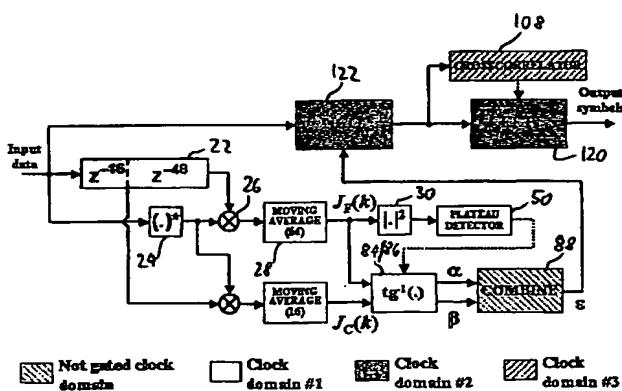

(57) Abstract: The IEEE 802.11 standard makes use of the Orthogonal Frequency Division Multiplex (OFDM) transmission scheme. The main feature of the OFDM is that the information stream is not transmitted into a single carrier, but is divided into several sub-carriers, each transmitting at a much lower rate. Furthermore, all these sub-carriers are orthogonal, i.e. they overlap their spectra but without causing mutual interference. In summary, there are the following inventions comprised in present application: the algorithm used for the frame detection, making use of a simplified differentiator to obtain an absolute maximum in the differentiated signal at that point where the first plateau in  $J_F(k)$  starts (output of the autocorrelator with  $N_d=64$ ); the design of the peak detector to obtain the position of the absolute maximum in the differentiated signal, dividing the problem into relative peak detection and falling edge detection; the use of a simplified XNOR-based crosscorrelator, and the simplifications therein based on the knowledge of the reference; the use of our particular solution for the CORDIC algorithm in the vectoring mode for arctangent calculation; the hardware structuring of the whole synchronizer, allowing a very simple control mechanism and the separation of this structure into different clock domains, each one being activated only to perform its operation and deactivated afterwards.

WO 2004/008706 A2